Stranger

Sound with expression

SA



BUYER'S GUIDE 2025

CELEBRATING

45 YEARS

BUY WITH CONFIDENCE

01

Stranger















DUAL CHANNEL POWER AMPLIFIER

SPB8K

2 x 4000 Watts RMS Output at 2 Ohms.
Balance & Unbalance Input.
Force Cooling by 2 Nos. 4" DC Fan.
Output VU Bar Graph LED.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
LPF Left & Right Switch
Power Supply: AC 220v 50 Hz.
Dimension: 483 (W) x 595 (D) x 155 (H) mm. | Weight: 37.700 kg. (approx.)

SPB6KB NEW

2 x 2200 Watts RMS output at 4 Ohms.
2 x 3000 Watts RMS Output at 2 Ohms. | Balance & Unbalance Input.
Force Cooling by 2Nos. 4" DC Fan. | Output VU Bar Graph LED.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
LPF Left & Right Switch
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 575 (D) x 155 (H) mm. | Weight: 39.160 kg. (approx.)

SPB5K

2 x 2500 Watts RMS Output at 2 Ohms. | Bridge mode : 5000 W at 4 Ohms Load
Balance & Unbalance Input.
Force Cooling by 2Nos. 4" DC Fan. | Output VU Bar Graph LED.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
LPF Left & Right Switch
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 575 (D) x 155 (H) mm. | Weight: 35.540 kg. (approx.)

SPB4KB NEW

2 x 1500 Watts RMS output at 4 Ohms
2 x 2000 Watts RMS Output at 2 Ohms. | Balance & Unbalance Input.
Force Cooling by 2 Nos. 4" AC Fan. | Output VU Bar Graph LED
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
LPF Left & Right Switch
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 550 (D) x 155 (H) mm. | Weight: 31.440 kg. (approx.)

SPB4K

2 x 2000 Watts RMS Output at 2 Ohms. | Balance & Unbalance Input.
Force Cooling by 2 Nos. 4" AC Fan. | Output VU Bar Graph LED
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
LPF Left & Right Switch
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 550 (D) x 155 (H) mm. | Weight: 30.820 kg. (approx.)

SPB3K

2 x 1500 Watts at 2 Ohms. | Bridge mode 3000 W at 4 ohms load
Horn speaker Switch | Balance & Unbalance Input
Force Cooling by 2 Nos. 4" AC Fan.
Output VU Bar Graph LED.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 510 (D) x 155 (H) mm. | Weight: 29.250 kg. (approx.)

SPB2K

2 x 1000 Watts RMS Output at 2 Ohms Load.
Bridge mode: 2000 W at 4 Ohms load.
Balance & Unbalance Input.
Force Cooling by 2 Nos. 4" AC Fan. | Output VU Bar Graph LED.
Protection: Temp, DC, RFI, Short Circuit, Overload, Mains over Voltage.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 480 (D) x 155 (H) mm. | Weight: 24.890 kg. (approx.)

DUAL CHANNEL POWER AMPLIFIER



SPB1400

2 X 700 Watts RMS output at 2 ohms load.
Bridge Mode: 1400 W at 4 ohms load | Balance & Unbalance Input.
Force Cooling by 2 nos. 4" AC Fan | Low & High Equilisation.
Protection: Temp, DC, RFI, Speaker Protection, Short Circuit, Overload & Mains over Voltage.
Power Supply: AC 220 V 50 Hz.
Dimension: 843 (W) x 480 (D) x 155 (H) mm. | Weight: 21.170 kg. (approx.)

AUDIO POWER AMPLIFIER



PBT1000

1000 Watts RMS Output at 1 / 2 / 4 Ohms. 70 /100 Volts.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
EQ / Flat Switch. | Input : Line 1V / 10K Ohms & Mic. 0.8 mv.
Protection: AC Bi-Metal Circuit Breaker, Short Circuit & Over Temperature with Visual LED Indication. | Power Supply: AC 220V 50 Hz.
Dimension: 510 (W) x 505 (D) x 155 (H) mm. | Weight: 35.000 kg. (approx.)



PBT751

750 Watts RMS output at 2/4 Ohms.
70 / 100 Volts. Output Level LED.
3 Way Tone Control. Horn Speaker Switch. Force Cooling.
Input Line 1V / 10K Ohms.
Protection: AC Circuit Breaker, Output Short Circuit & Over Temperature.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 460 (D) x 155 (H) mm. | Weight: 26.000 kg. (approx.)



PBT701

700 Watts RMS Output at 2 / 4 Ohms.70 / 100 Volts. | Output Level LED.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
Input Line 1V / 10K Ohms. | Protection: AC Bi-Metal
Circuit Breaker, Short Circuit & Over Temperature with Visual LED Indication.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 460 (D) x 155 (H) mm. | Weight: 25.000 kg. (approx.)



PBT501

500 Watts RMS Output at 2 / 4 Ohms. 70 / 100 Volts. | Output Level LED.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
Input Line 1V / 10K Ohms. | Protection: AC Bi-Metal Circuit Breaker,
Short Circuit & Over Temperature with Visual LED Indication.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 425 (D) x 155 (H) mm. | Weight: 21.090 kg. (approx.)



PBT502

500 Watts RMS Output at 2 / 4 Ohms. 70 / 100 Volts. | Output Level LED.
3 Way Tone Control. | Horn / Speaker Switch. | Force Cooling.
Input Line 1V / 10K Ohms. 100V IN for Relay use
Protection: AC Bi-Metal Circuit Breaker,
Short Circuit & Over Temperature with Visual LED Indication.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 425 (D) x 155 (H) mm. | Weight: 21.420 kg. (approx.)

MULTI INPUT POWER AMPLIFIER



MA516

500 Watts RMS Output at 2 / 4 Ohms. I 70 / 100 Volts.
2 Way Tone Control. I Horn / Speaker Switch. I Force Cooling.
Master Control. I Input 6 Mic. / 2 AUX. | Output Bar Graph LED.
Protection: AC Bi-Metal Circuit Breaker, Short Circuit &
Over Temperature with Visual LED Indication.
Power Supply: AC 220v 50 Hz.
Dimension: 483 (W) x 425 (D) x 155 (H) mm. I Weight: 19.070 kg. (approx.)



MA515

500 Watts RMS Output at 2 / 4 Ohms. I 70 / 100 Volts. I 2 Way Tone Control.
Master Control. I Horn / Speaker Switch. I Input 6 Mic. / 2 AUX.
MP3 Player with Recording I USB/MMC Card Slot with LCD Display & Remote,
Bluetooth I Protection: AC Bi-Metal Circuit Breaker, Short Circuit &
Over Temperature with Visual LED Indication.
Power Supply: AC 220v 50 Hz.
Dimension: 483 (W) x 425 (D) x 155 (H) mm. I Weight: 19.170 kg. (approx.)



PBT252

250 Watt RMS at 4/8 Ohms, 70/100 Volt I 2 Way Tone Control.
Horn / Speaker Switch I Master Control I Input 6 Mic/2 Aux.
Protection: DC Bi-Metal Circuit Breaker & AC Glass Fuse.
Power Supply: 220V AC 50Hz ±10% / 24 V Battery.
Dimension: 483(W) x 405(D) x 155(H) mm I Weight:16.250 kg. (approx.)



MA251

250 Watts RMS Output at 4 / 8 Ohms. I 70 / 100 Volts. I 2 Way Tone Control.
Horn / Speaker Switch I Master Control.
MP3 Player with Recording I USB/MMC Card Slot with LCD Display & Remote,
Bluetooth I Input 6 Mic. / 2 AUX.
Protection: DC Bi-Metal Circuit Breaker & AC Glass Fuse.
Power Supply: AC 220v 50 Hz ± 10% / 24v Battery.
Dimension: 483 (W) x 405 (D) x 155 (H) mm. I Weight: 15.890 kg. (approx.)



MA161

160 Watt RMS at 4/8 Ohms, 70/100Volt I 2 Way Tone Control.
Horn / Speaker Switch Master Control I Input 6 Mic / 2 Aux.
MP3 Player with Recording I USB/MMC Card Slot with LCD Display & Remote,
Bluetooth I Protection : DC Bi-Metal Circuit Breaker & AC Glass Fuse.
Power Supply: 220V 50Hz AC ± 10% / 24V Battery.
Dimention : 483(W) X 405(D) X 155(H) mm I Weight : 12.560 kg (approx.)



MCU125

125 Watt RMS Output at 4/8 Ohms 70/100 Volts. Input
5 Mic /2 Aux I 2 Way Tone Control I Master Control
Output Bar Graph LED I Horn/Speaker Switch
MP3 Player with Recording I USB/MMC Card Slot with LCD Display & Remote.
Protection: DC Circuit Breaker for Overload & AC Glass Fuse.
Power Supply: AC 220V 50 Hz / 12V Battery.
Dimension: 472(W) x 330 (D) x 130 (H) mm I Weight: 10.640kg. (approx.)



MCU100

100 Watt RMS Output at 4 / 8 / 16 Ohms 70/100 Volts.
Input 4 Mic /1 Aux. I 3 Way Tone Control. I Master Control.
Output Bar Graph LED. I Horn / Speaker Switch.
MP3 Player with Recording I USB/MMC Card Slot with LCD Display & Remote.
Protection: DC Circuit Breaker for Overload & AC Glass Fuse.
Power Supply: AC 220V 50 Hz / 12V Battery.
Dimension: 416 (W) x 320 (D) x 130 (H) mm I Weight: 8.330 kg. (approx.)

MULTI INPUT POWER AMPLIFIER



MCU45

45 Watt RMS Output at 4 / 8 / 16 OHMS.100 Volts.
Input 3Mic. / 1 Aux. / MP3 Player. I 2 Way Tone Control. I Digital Echo.
MP3 Player with Recording I USB/MMC Card Slot with LCD Display & Remote.
Bluetooth
Power Supply: AC 220V 50 Hz / 12V Battery.
Dimension: 342 (W) x 235 (D) x 110 (H) mm. I Weight: 4.600 kg. (approx.)

AUDIO PERIPHERALS



TBA20 [TALK BACK AMPLIFIER]

Voice range amplifier suitable to drive Headset with Mic. upto 10 Nos.
for Studio Communications.
6.3 mm Stereo Socket for Mic. / Duplex Headset.
Output Individual Volume Control for Headset (10 Nos.).
Input Gain Control for Microphone & Auxiliary Sensitivity.
Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 245 (D) x 78 (H) mm I Weight: 3.400 kg. (approx.)



DA20 [DISTRIBUTOR AMPLIFIER]

Input Attenuate Control for Left & Right.
Drive 10 Stereo Amplifiers or 20 Mono Amplifiers.
Input Impedance 10K Ohms unbalance (¼" Jack).
Output Impedance 300 Ohms unbalance (¼" Jack).
Frequency: 10 Hz - 20 KHz. I Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 230 (D) x 64 (H) mm. I Weight: 2.500 kg. (approx.)



DA8 [DISTRIBUTOR AMPLIFIER]

Input Attenuate Control (4 Zone) I Drive 2 x 4 Zone
Input Impedance 10K Ohms unbalance (¼" Jack).
Output Impedance 300 ohms unbalance (¼" Jack).
All outputs are isolated to minimise hum and interference
All Channels with Phase Shift Switch I Frequency: 10 Hz - 20 KHz.
Power Supply: AC 220v 50 Hz.
Dimension: 483 (W) x 190 (D) x 64 (H) mm I Weight: 2.650 kg. (approx.)



DAX20 [DISTRIBUTOR AMPLIFIER]

Input Attenuate Control for Left & Right & Mono Switch.
Drive 10 Stereo Amplifiers or 20 Mono Amplifiers.
Input Impedance 10K Ohms balance (¼" Jack & XLR Socket).
Output Impedance 300 Ohms balance (XLR Socket).
Frequency: 10 Hz - 20 KHz. I Power Supply: AC 220V 50 Hz.
Dimension: 483 (W) x 215 (D) x 75 (H) mm. I Weight: 2.800 kg. (approx.)



EQ215 / Q215 [GRAPHIC EQUALISER]

Dual 15 band EQ. with ± 12 dB I Output Level LEDs.
25 Hz to 16 KHz effective equalization range.
Low Cut Activates the 50 Hz 12 db **(EQ215)** / Octave High-Pass Filter.
Select Either ± 6 db or ± 12 db Boost **(EQ215)** / Cut Range.
Clip LED Light for Excessive Gain & Excessive Frequency **(EQ215).**
By-Pass Switch with Status LED
XLR and ¼ inch inputs.
Outputs for balanced and Un-balanced Operation.
Power Supply: AC 220v 50 Hz.
Dimension: 481 (W) x 174 (D) x 45 (H) mm I Weight: 1.800 kg. (approx.)
Dimension: 482 (W) x 262 (D) x 70 (H) mm I Weight: 1.850 kg. (approx.)













AUDIO PERIPHERALS

HA8X [HEAD PHONE AMPLIFIER]

Drive 8 Stereo Headphone from LINE/AUX Source.
Individual Gain Control for Left and Right Channels.
Power Supply: AC 220V 50 Hz.
Dimension:483 (W) x 215 (D) x 64 (H) mm. I Weight: 2.480 kg. (approx)

ACM2X [ACTIVE CROSSOVER - 2WAY STEREO]

Crossover Selectable Frequency:- 68 Hz to 480 Hz & 680 Hz to 4.8 KHz by selected switch.
Individual Output Control for Both Frequency Bands.
Power Supply: AC 220V 50 Hz.
Dimension: 485 (W) x 200 (D) x 64 (H) mm. I Weight: 2.510 kg. (approx)

DIGITAL ECHO

SP8001 [DIGITAL SOUND PROCESSOR]

Echo & Reverb / Chorus separate section to use separately or mixed mode. Individual Control.
Echo Switch to select 3 modes Echo and mixed 2 modes.
Reverb / Chorus – Depth & Duration Controls (Parameter).
Input 2 Mic. & Aux IN / OUT. I Output level LCD display I Bass &Treble Effects.
Effects On / Off Switch I Option to operate direct Mic. through Mixer
Power Supply: AC 220V 50 Hz.
Dimension: 480 (W) x 208 (D) x 105 (H) mm. I Weight: 3.320 kg. (approx.)

DE403 [MULTI MODE DIGITAL ECHO]

3 Mode Digital Echo. I 3 Mic. & Aux Input.
Echo Depth & Delay Time
Feedback Control Option to Operate Direct Mic. / Mixer.
Power Supply: AC 220V 50 Hz / 12V DC.
Dimension: 345 (W) x 175 (D) x 50 (H) mm. I Weight: 1.670 kg. (approx.)

DE401 [DIGITAL ECHO]

3 Mic. & Aux Input. I Echo Depth & Delay Time
Feedback Control Option to Operate Direct Mic. / Mixer.
Power Supply: AC 220V 50 Hz / 12V DC.
Dimension: 255 (W) x 175 (D) x 50 (H) mm.
Weight: 1.260 kg. (approx.)

AUDIO MIXER

SM1603E/1203E [16/12 Channel Audio Mixer]

Balanced (Input & Output). Balanced XLR.
Frequency Response 25 Hz – 20 KHz. I Digital Echo 20 – 400 Mili Sec.
60 mm Long Taper Faders.
Mic. Input 2K Ohms. Line Input 20K Ohms Balanced / 42 dB.
Gain: -10 dB to -72 dB. S/N Ratio 89 dB. Distortion 0.01%.
Main Out (L+R) XLR Balanced / Unbalanced PL Socket.
Stereo RCA Output for Recording.
3 Band Active EQ on each Channel (Low, Mid & High).
2 AUX send (Pre-fader & Post-fader) level, Pan Control, L & R, Mono & Mute Switch on each Channel.
Power Supply: 23VA Max / 19VA Max @ AC 220V / 50 Hz. (External Power Supply)
Dimension: 662 (W) x 380 (D) x 110 (H) mm. I Weight: 6.600 kg. (approx.)
Dimension: 543 (W) x 380 (D) x 110 (H) mm. I Weight: 5.530 kg. (approx.)

AUDIO MIXER



SM1242E [12 Channel Audio Mixer]

Un-Balanced (Input & Output) Echo mixer
Frequency response 25 Hz - 20 kHz | Digital Echo 20 - 400 mili sec.
30mm long taper fader | Mic Input 2k ohms | Mono Line Input 10k ohm
Gain : -10 dB TO -72 dB | S/N Ratio 70dB Distortion 0.01%
4 Band Active Tone Control on each channel (Bass, Low-Mid, High-Mid & High)
2 Aux send (Pre-fader & Post fader) Level and Pan Control on each channel
Output Metering 10 Segment LED
Power Supply : 11 VA Max @ 220V AC 50Hz ± 10% (External Power Supply)
Dimension : 465(W) x 355(D) x 105(H)mm. | Weight: 5.030 kg (approx.)



SM120E/800E [12/8 Channel Audio Mixer]

Un-Balanced (Input / Output). | Frequency Response 25 Hz – 20 KHz.
Digital Echo 20 – 400 mili Sec. | Fader 30 mm for each Channel.
Mic Input 2K Ohms. Mono Line Input 10K Ohms. | Bluetooth
Gain: -10 dB to -50 dB. S/N Ratio 70 dB. Distortion 0.01%.
Tone Control: Bass ±16 dB, Mid ±10 dB & Treble ±16 dB.
Effect Return: -30 dB Max. Effect Send (Pre Fader): 5.5V Max.
Channel Signal Indication Clip LED. | Output Metering 10 segment LED.
Power Supply: 11VA / 9VA Max @ AC 220V / 50 Hz (External Power Supply).
Dimension: 465 (W) x 355 (D) x 105 (H) mm. | Weight: 4.440 kg. (approx.)
Dimension: 355 (W) x 355 (D) x 105 (H) mm. | Weight: 3.770 kg. (approx.)



SM120U/SM80U [12/8 Channel Audio Mixer with USB & Recording system]

Un-Balanced (Input / Output). | Frequency Response 25 Hz – 20 KHz.
Digital Echo 20 – 400 mili Sec. | Fader 30 mm for each Channel.
Mono Line Input 10K Ohms.
Mic. Input 2K Ohms. Gain: -10 dB to -50 dB. S/N Ratio 70 dB.
Distortion 0.01%. | Tone Control: Bass ±16 dB, Mid ±10 dB & Treble ±16 dB.
Effect Return: -30 dB Max. Effect Send: 5.5V Max.
Channel Signal Indication Clip LED. Main Output Metering 10 segment LED.
MP3 Player with Recording | USB / MMC Card Slot with LCD Display & Remote.
Power Supply: 11VA / 9VA Max @ AC 220V / 50 Hz (External Power Supply).
Dimension: 465 (W) x 355 (D) x 105 (H) mm. | Weight: 4.910 kg. (approx.)
Dimension: 355 (W) x 355 (D) x 105 (H) mm. | Weight: 3.980 kg. (approx.)



SXR32 / SXR24 [32/24 Channel Audio Mixer with USB & Recording system]

Balanced & Un-Balanced (input & Output) | 24/32 Input
48 V phantom power in all channels
4 Band Channel EQ (High, High Mid, Low Mid, Low) | 100 Long taper fader
Frequency Response 20Hz – 20kHz | Gain:- (+0db) – (-60db)
4 Aux (3 pre fader & 1 post fader) | Built-in DSP digital 99 Effects
1 – 4 Channel Compressor | 9-band stereo graphic equaliser
MP3 Player with Recording & USB
PAN Control, Mute Switch, Group Switch, PFL Switch in each Channel
Power Supply: 220V AC 5Hz.
Dimension: 840(W) X 542(D) X 150(H) mm | Weight: 12.400 kg.
Dimension: 1090(W) X 550(D) X 140(H) mm | Weight: 15.600 kg



SXR16 [16 Channel Audio Mixer with USB & Recording system]

Balanced (Input & Output) Echo mixer | 16 Inputs | 48V phantom power
3 band channel EQ. (High, Mid & Low)
Frequency response 25 Hz - 20 kHz | 60mm long taper fader
Gain : -10 dB to -60 dB | S/N Ratio 89 dB Distortion 0.01%
3 Aux send (Pre-fader & Post fader) | Built-in DSP digital
7-band stereo graphic equiliser | MP3 Player with Recording & USB
Power Supply : 220V AC 50Hz (External Power Supply)
Dimension : 625(W) x 390(D) x 90(H)mm. | Weight : 6.660 kg (approx.)













AUDIO MIXER

SXR12 [12 Channel Audio Mixer with USB & Recording system]

Balanced (Input & Output) Echo mixer I 12 Inputs I 48V phantom power
3 band channel EQ. I Frequency response 25 Hz - 20 kHz
60mm long taper fader I Gain : -10 dB TO -60 dB
S/N Ratio 89 dB Distortion 0.01%
3 Band Active Eq. on each channel (High, Mid & Low)
2 Aux send (Pre-fader & Post fader)
Level and Pan Control each channel & Mute switch
Built-in DSP digital effects I 7-band stereo graphic equiliser I
MP3 Player with Recording & USB
Power Supply : 21 VA Max @ 220V AC 50Hz ± 10% (External Power Supply)
Dimension: 465(W) x 390(D) x 85(H)mm. I Weight: 5.820 kg (approx.)

SXR6 [6 Channel Audio Mixer with USB & Recording system]

6 Channels Stereo Echo Mixer.
Digital Echo 20 – 400 m/s. Frequency 25 Hz – 25 KHz.
MP3 Player with Recording & USB I Bluetooth
Input Gain: – 50 dB to 6 dB gain range with overdrive indication.
Output 0 dBm / 17 dBm (775mv / 5.5v)
Equalization: Bass, Mid & Treble ± 5 dB I Output metering 10 segment LED
Controls: Gain, Eq., Pan, Echo, Fader.
Power Supply: AC 220V 50 Hz (External Power Supply)
Dimension: 230 (W) x 245 (D) x 50 (H) mm. I Weight: 1.780 kg. (approx.)

SM6 [6 Channel Audio Mixer]

6 Channels Stereo Echo Mixer.
Digital Echo 20 – 400 m/s. Frequency 25 Hz – 25 KHz.
Input Gain: – 50 dB to 6 dB gain range with overdrive indication.
Output 0 dBm / 17 dBm (775mv / 5.5v) I Equalization: Bass & Treble ±5 dB.
Controls: Gain, Eq., Pan, Echo, Fader.
Power Supply: AC 220V 50 Hz (External Power Supply)
Dimension: 290 (W) x 165 (D) x 80 (H) mm. I Weight: 1.590 kg (approx.)

UM6 [6 Channel Audio Mixer with USB & Recording system]

6 Channels Stereo Echo Mixer.
Digital Echo 20 – 400 m/s.Frequency 25 Hz – 25 KHz.
MP3 Player with Recording I USB & MMC Card Slot & Remote I Bluetooth
Input Gain: – 50 dB to 6 dB gain range with overdrive indication.
Output 0 dBm / 17 dBm (775mv / 5.5v) I Equalization: Bass & Treble ±5 dB.
Controls: Gain, Eq., Pan, Echo, Fader.
Power Supply: AC 220V 50 Hz (External Power Supply)
Dimension: 290 (W) x 165 (D) x 80 (H) mm. I Weight: 1.650 kg (approx.)

MM5 [5 Channel Audio Mixer]

5 Channels Audio Mixer. I Frequency 25 Hz – 25 KHz.
Input Gain: – 50 dB to 8 dB gain range with overdrive indication.
Output 0 dBm / 17 dBm (775mv / 5.5v)
Equalization: Bass & Treble ±10 dB each channel and Master Equalization.
Controls: Gain, Fader, 2 Master Control. I Power Supply: AC 220V 50 Hz.
Dimension: 220 (W) x 150 (D) x 65 (H) mm. I Weight: 1.200 kg (approx.)

AR5U [Professional Recording Sound Card Mixer] NEW

5 Channel Stereo Mixer. I Effects: Digital Echo 20-400 m/s.
Frequency 20 Hz to 30 KHz. I Input Gain for Mic. - 60 db max.
MP3 Player with Recording & USB. I Input / Output Level ± 17 db.
Equilisation: Bass, Mid & Treble ± 15 db.
Phantom Power Supply for Condenser Mic.
Audio Interface Support 24 bit / 192 KHz.
Power Supply: DC 12V (External Power Supply)
Dimension: 190 (W) x 180 (D) x 55 (H) mm I Weight: 1.340 Kg. (approx.)



AUDIO MIXER

MM4 [4 Channel Audio Mixer]

4 Channels Audio Mixer. | Frequency 25 Hz – 20 KHz.
Input: 3 Mic & 1 AUX. Separate Volume Control for each input.
Output: 1V/600 Ohms (Max 3.5V). | Master Control
Overload LED for setting optimum Distortion Free Input Level.
Power Supply: AC 220V 50 Hz.
Dimension: 180 (W) x 100 (D) x 45 (H) mm. | Weight: 650 g (approx.)



POWERED MONITOR

PM492 [TWO WAY ACTIVE MONITOR SPEAKER] NEW

15" speaker & Dynamic Horn tweeter.
500 Watts RMS output.
Painted wooden cabinet.
Balance Auxilary input and output.
Microphone input.
High and Low control.
Dimension : 440 (W) x 400 (D) x 715 (H) mm. | Weight :29.500 kg.



PM165

160 Watts Output. | 12" Speaker and Horn Tweeter. Line IN/Out.
Painted wooden cabinet.
Power Supply: AC 220V 50 Hz.
Dimension: 410 (W) x 295 (D) x 550 (H) mm. | Weight: 17.700 kg. (approx.)



PM120 [POWERED MONITOR]

120 Watts RMS | 12" Heavy Duty Speaker & Horn Tweeter.
Aux 1V / 10V Ohms Balance. | Bass & Treble Control.
Painted wooden cabinet.
Power Supply: AC 220V 50 Hz.
Dimension: 550 (W) x 375 (D) x 440 (H) mm | Weight: 16.590 kg (approx.)

MUSICAL AMPLIFIER



RM120 [GUITAR, BASS GUITAR & KEYBOARD]

RM120 Head Delivers 120 Watts RMS Power at 8 Ohms.
3 Fully Independent Input Channels. i) Bass Guitar Channel with Low / High Tone Control & 6 Band Graphic Equalizer with Compressor Limiter.
ii) Keyboard Channel with Low / High Tone Control and Reverb Mix Switch.
iii) Guitar Channel with 3 Band Equalizer,
Reverb effect control & Overdrive Effect Switch & Line Out.
Compact Carpet Finish Cabinet. | Power Supply: AC 220V 50 Hz.
Dimension: 515 (W) x 308 (D) x 140 (H) mm. | Weight: 8.400 kg (approx.)



BASSMAN 20 [BASS GUITAR]

Bassman 20 Head Delivers 120 Watts RMS Power at 8 Ohms.
One Channel Two Input for Bass Guitar Amplifier.
6 Band Graphic Equalizer with Bright Switch & Line Out.
Compact Carpet Finish Cabinet. | Power Supply: AC 220V 50 Hz.
Dimension: 420 (W) x 275 (D) x 130 (H) mm. | Weight: 6.930 kg (approx.)

Stranger

MUSICAL AMPLIFIER WITH SPEAKER



PM192 [Guitar, Octopad /Keyboard & Mic]

190 Watts Output. | 15" Speaker & 2 Tweeter.
3 Channels with Individual Controls.
Mic. (Low Impedance), Aux for (Octopad / Keyboard)
1v/10K Ohms (Stereo Input) & Guitar (Lead Guitar).
Tone Control: Bass, Low-Mid, Hi-Mid & Treble ±10 dB.
Clip Control Switch to Minimize Overdrive.
Metal Grill & Plywood Carpet Finish.
Power Supply: AC 220v 50 Hz.
Dimension: 550 (W) x 280 (D) x 580 (H) mm. | Weight: 23.220 kg (approx.)



PM162 [Vocal, Guitar , Auxilary & MP3 Player]

160 Watts Output. | 12" Speaker & Horn Tweeter
3 Channels With Individual Controls. | Effects: Digital Vocal Echo.
Built in Cordless Receiver & Microphone
MP3 Player with Recording | Bluetooth | USB & MMC Card Slot & Remote.
Tone Control: Bass, Mid & Treble ± 10 dB
Painted wooden cabinet. | Line Out
Power Supply : AC 220V 50Hz
Dimension : 410(W) x 295(D) x 550(H) mm | Weight : 18.570 kg (approx.)



PM102 [GUITAR, OCTAPAD / KEYBOARD & MIC]

120 Watts Output. | 12" Speaker & Horn Tweeter.
3 Channels with Individual Controls. | Mic. (Low Impedance),
Aux for (Octopad / Keyboard) 1V/10K Ohms (Stereo Input) &
Guitar (Lead Guitar). | Tone Control: Bass, Low-Mid, Hi-Mid & Treble ±10 dB.
Master Control. | Compact Size, Metal Grill & Plywood Carpet Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 400 (W) x 380 (D) x 500 (H) mm. | Weight: 16.920 kg (approx.)



CS100 [Combo Stereo Amplifier]

2 x 50 Watt Output | 2 x 8" Speaker & Tweeter.
4 INPUT [Guitar, Mic, Auxiliary (Stereo), MP3 (Bluetooth) with Recording].
Tone Control (Bass & Treble ± 10 dB) | Effect: Digital Echo.
Compact Size, Metal Grill & Plywood Carpet Finish | Line Out (Stereo).
Power Supply : 220V AC 50Hz ±10%.
Dimension : 500(W) x 275(D) x 370(H) mm. | Weight: 12.540 kg. (approx.)



C80R [GUITAR, AUXILIARY & MIC]

80 Watts RMS with 12" Speaker.
3 Way Tone Control Bass, Mid & Treble ± 10 dB.
Master Control.
3 Independent Channels & Line Out.
Digital Effect Processor (24 Effects) Number display & Over Drive.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50Hz.
Dimension: 390 (W) x 280 (D) x 475 (H) mm. | Weight: 13.300 kg (approx.)



CUBE80E [GUITAR, KEYBOARD & MIC]

80 Watts RMS | 12" Speaker
3 Way Tone Control Bass, Mid & Treble ±10 dB.
3 Input 2 Channels for Guitar, Keyboard, 1 Mic. (Low Impedance) &
Line Out | Digital Echo.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 380 (W) x 280 (D) x 480 (H) mm. | Weight: 13.250 kg (approx.)

MUSICAL AMPLIFIER WITH SPEAKER



C50 [VOCAL, GUITAR & AUX, MP3 Player]

50 Watts Output with 12" Speaker & Tweeter.
Effects: Digital Vocal Echo | Tone Control: Bass & Treble
3 Channels with Individual Controls.
MP3 Player with Recording | Bluetooth.
Line Out. | Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 360 (W) x 255 (D) x 430 (H) mm. | Weight: 10.440 kg (approx.)



CUBE40E [GUITAR, KEYBOARD & MIC]

40 Watts RMS | 12" Speaker
3 Way Tone Control Bass, Mid & Treble ±10 dB.
3 Input 2 Channels for Guitar, Keyboard & 1 Mic. (Low Impedance) &
Line Out. | Digital Echo.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 360 (W) x 255 (D) x 430 (H) mm. | Weight: 11.000 kg (approx.)



PM50 [Vocal, Guitar & MP3 Player with Cordless Microphone] NEW

50 Watts RMS Output with 10" Speaker & Dynamic Tweeter.
Effects: Digital Vocal Echo.
Built in Cordless Receiver & Microphone. (Hand Mic)
2 Way Tone Control.
Input: Microphone & Guitar. MP3 Player & Recording with Bluetooth.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220v 50 Hz (External Power Supply). /12v DC Built in Lithium Ion Battery with Auto Changeover Rechargeable type
Dimension: 330 (W) x 300 (D) x 490 (H) mm. | Weight: 9.440 Kg. (approx.)



C44 [VOCAL, GUITAR & AUX, MP3 Player]

40 Watts Output with 10" Speaker & Horn Tweeter.
Effects: Digital Vocal Echo. | Built in Cordless Receiver & Microphone.
Tone Control: Bass & Treble ± 10 dB | 3 Channels With Individual Controls.
MP3 Player with Recording | Bluetooth | Line Out.
Compact Size Metal Grill & Plywood Rexine Finish
Power Supply : AC 220v 50 Hz (External Power Supply). /12v DC Built in Lithium Ion Battery with Auto Changeover Rechargeable type
Dimension : 355(W) x 250(D) x 425(H) mm | Weight : 8.600 kg (approx.)



PM40 [OCTAPAD / KEYBOARD, BASS GUITAR & MIC]

40 Watts. | 6" Speaker& Tweeter. | Effect: Digital Echo.
Line Out.
Mic. (Low Impedance), Aux for (Octopad / Keyboard)
1V/10K Ohms & Bass Guitar. | Tone Control: Bass & Treble ±10 dB.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 235(W) X 255(D) X 335(H) mm. | Weight: 6.020 kg (approx.)



NS35 [MIC & GUITAR]

35 Watts RMS with 10" Speaker.
3 Way Tone Control Bass, Mid & Treble ±10 dB.
Master Control.
2 Independent Channels& Line Out
Digital Effect Processor (24 Effects) | Numbering Display & Over Drive.
Compact Size, Plywood Rexine Finish. | Metal Grill.
Power Supply: AC 220v 50 Hz.
Dimension: 480 (W) x 255 (D) x 420 (H) mm | Weight: 9.290 kg. (approx.)

MUSICAL AMPLIFIER WITH SPEAKER



STUDIO30 [MIC & GUITAR]

30 Watts RMS With 10" Speaker.
2 Way Tone Control: Bass & Treble ± 10 dB.
2 Independent Channels & Line Out.
Effect: Digital Reverb.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220 V 50 Hz.
Dimension: 480 (W) x 255 (D) x 420 (H) mm. | Weight: 9.450 kg. (approx.)



NS30E [GUITAR & KEYBOARD]

30 Watts RMS. | 10" Heavy Duty Speaker I Line Out and Pre-Out.
2 Input 1 Channel for Guitar / Keyboard.
Tone Control: Bass, Mid & Treble ±10 dB.
Effects: Distortion & Digital Echo.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 370 (W) x 230 (D) x 395 (H) mm. I Weight: 9.200 kg (approx.)



PM25 [Vocal, Guitar & MP3 Player with Cordless Microphone] NEW

25 Watts RMS Output with 8" Speaker. | Effects: Digital Vocal Echo.
Built in Cordless Receiver & Microphone. (Hand Mic) | 2 Way Tone Control.
Input: Microphone & Guitar. MP3 Player & Recording with Bluetooth.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220v 50 Hz (External Power Supply). /12v DC Built in Lithium Ion Battery with Auto Changeover Rechargeable type
Dimension: 255 (W) x 245 (D) x 410 (H) mm. | Weight: 5.200 Kg. (approx.)



C29M [VOCAL, KEYBOARD & AUX, MP3 Player with Cordless Microphone]

20 Watts RMS Output with 8" Dual Cone Speaker.
Effects: Digital Vocal Echo. (Mic. 1)
Built in Cordless Receiver & Microphone.
3 Mic. Low Impedance / 1 Aux. / MP3 Player with Recording. | Line Out.
Compact Size, Moulded Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz /12V DC Built in Lithium ion Battery.
Auto Changeover & Rechargeable type.
Dimension: 280 (W) x 163 (D) x 340 (H) mm. | Weight: 5.650 kg (approx.)



C28 [VOCAL, KEYBOARD, AUXILIARY & MP3 Player]

20 Watts RMS Output with 8" Dual Cone Speaker.
Digital Vocal Echo (Mic. 1). I Tone Control Bass & Treble ±10 dB.
3 Mic. Low Impedance / 1 Aux. / MP3 Player with Recording. | Line Out.
Compact Size, Moulded Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz /12V DC Built in Lithium ion Battery.
Auto Changeover & Rechargeable type.
Dimension: 280 (W) x 163 (D) x 340 (H) mm. I Weight: 5.390 kg (approx.)



CUBE24 [VOCAL, KEYBOARD & AUXILIARY]

20 Watts RMS with 8" Dual Cone Speaker. I Digital Vocal Echo (Mic. 1).
Tone Control Bass & Treble ±10 dB.
3 Mic. Low Impedance, 1 Aux. (10K Ohms)
Line Out
Compact Size, Moulded Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz, 12V DC Built in Lithium ion Battery.
Auto Changeover & Rechargeable type.
Dimension: 280 (W) x 163 (D) x 340 (H) mm. I Weight: 4.890 kg (approx.)

MUSICAL AMPLIFIER WITH SPEAKER



C27 [GUITAR, KEYBOARD, MIC & MP3 Player]

20 Watts RMS Output with 8" Dual Cone Speaker.
Effects: Digital Echo & Distortion. | Tone Control Bass, Mid & Treble ±10 dB.
3 Individual Channels / MP3 Player with Recording | Bluetooth
Line Out & Headphone.
Compact Size, Moulded Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz. / 12V Battery.
Dimension: 280 (W) x 163 (D) x 340 (H) mm. | Weight: 4.920 kg (approx.)



C20R [GUITAR & MIC]

20 Watts RMS | 8" Dual Cone Speaker.
2 Input for Guitar & Mic & Line Out.
3 Way Tone Control Bass, Mid & Treble ± 10 dB.
Frequency Response 50 Hz. – 15 kHz. | Digital Reverb & Chorus
AC Mains Fuse Protection & Mains On LED Indication.
Compact Size, Moulded Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 280 (W) x 163 (D) x 340 (H) mm. | Weight: 4.800 Kg (approx)



CUBE20M [GUITAR, KEYBOARD & MIC]

20 Watts RMS Output. | 8" Dual Cone Speaker.
3 Way Tone Control Bass, Mid & Treble ±10 dB.
3 Input 2 Channels for Guitar / Keyboard & 1 Mic. (Low Impedance),
Line Out, Pre-Out and Headphone.
Power Supply: AC 220V 50 Hz.
Dimension: 275 (W) x 153 (D) x 300 (H) mm. | Weight: 4.800 kg (approx.)



C20 [GUITAR, KEYBOARD & MIC]

20 Watts RMS | 8" Dual Cone Speaker.
3 Way Tone Control Bass, Mid & Treble ±10 dB.
3 Individual Channels for Guitar, Keyboard & 1 Mic. (Low Impedance),
Line Out and Headphone.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 275 (W) x 153 (D) x 300 (H) mm. | Weight: 4.640 kg (approx.)



C15 [GUITAR, KEYBOARD & MIC]

15 Watts RMS Output with 6" Speaker.
Effects: Digital Echo & Distortion.
3 Way Tone Control Bass, Mid & Treble.
3 Input 2 Channels, Line Out / Headphone.
Compact Size, Metal Grill & Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz.
Dimension: 242 (W) x 158 (D) x 245 (H) mm. | Weight: 3.550 kg (approx.)



C10 [GUITAR, KEYBOARD, MIC]

10 Watts Class D Powered with 5" Speaker.
Effects: Digital Echo | 2 Way Tone Control.
3 Input Two Channels. (Guitar / Aux & Mic) | Line Out.
Compact Size, Plywood Rexine Finish.
Power Supply: AC 220V 50 Hz | External Power Supply
Built in Lithium ion Battery.
Dimenssion: 210(W) x 155(D) x 210(H) mm. | Weight: 2.320 kg (approx.)













SPEAKER SYSTEM

HD228 / HD215

2 Way Sound Reinforcement System.
Twin 15" Speaker with 100 mm Voice Coil./
Twin 15" Speaker with 68 mm Voice Coil.
Titanium Compression Driver with Horn.
2600 Watts Peak./ 1400 Watts Peak.
1300 Watts Prog./ 700 Watts Prog.
Heavy Duty Cross Over. I Heavy Duty Metal Grill.
Dimension: 570 (W) x 540 (D) x 1240 (H) mm./
Dimension: 480 (W) x 380 (D) x 1240 (H) mm.
Weight: 58.320 kg (approx.)/ 40.350 kg (approx.)

M122H / M122

2 Way Sound Reinforcement System.(M122H)
Twin 12" Speaker with 45 mm Voice Coil.
1 Piezo Horn Tweeter.(M122H)
600 Watts Peak./ 480 Watts Peak.
300 Watts Prog./ 240 Watts Prog.
Heavy Duty Metal Grill.
Dimension: 440 (W) x 360 (D) x 920 (H) mm./
Dimension: 440 (W) x 360 (D) x 770 (H) mm.
Weight: 26.100 kg (approx.) / 24.280 kg (approx.)

15H4 / 12H7

2 Way Sound Reinforcement System.
15" Speaker with 54 mm Voice Coil./
12" Speaker with 45 mm Voice Coil.
1 Piezo Horn Tweeter.
600 Watts Peak. / 300 Watts Peak.
300 Watts Prog. / 150 Watts Prog.
Heavy Duty Metal Grill.
Dimension: 480 (W) x 440 (D) x 650 (H) mm./
Dimension: 430 (W) x 355 (D) x 585 (H) mm.
Weight: 19.770 kg (approx.) / 13.640 kg (approx.)

LHD18/L18

Vented Subwoofer System.
1000 Watts / 600 Watt Program.
18" with 100 mm Voice Coil.
Internal Low – Pass Crossover Network. I Heavy Duty Metal Grill.
Dimension: 615 (W) x 583 (D) x 680 (H) mm.
Weight: 38.000 kg (approx.)

ML8

Wall Speaker. I 8" with 26 mm Voice Coil with Built in LMT.
30 Watts Program.
Dimension: 292 (W) x 190 (D) x 315 (H) mm.
Weight: 3.440 kg (approx.)


CM15T

Twin 6" X 4" Column Speaker with LMT.
Dimension: 165 (W) x 145 (D) x 442 (H) mm.
Weight: 3.500 kg (approx.)



PEDALS

SVP2 [Stereo Volume Pedal (Optical)]
Battery Operated.
2 Inputs & 2 Outputs Socket.
0 Level Setting Control.
ABS Moulded Cabinet.
Dimension: 93 (W) x 215 (D) x 58 (H) mm.
Weight: 590 g (approx.)

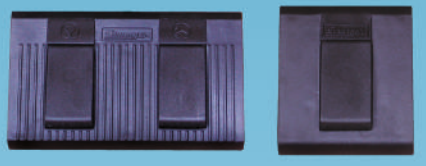

PSP2 / PSP1
Twin Patch Switch Pedal for
Electronic Drum.
Normally Connected (NC).
Twin Switch for Effects Up/Down.
Dimension: 150 (W) x 90 (D) x 30 (H) mm./
Dimension: 80 (W) x 90 (D) x 30 (H) mm.
Weight: 280 g (approx.) / 180 g (approx.)

MICROPHONES



SWM33DH
Wireless Microphone System. I Dual Channel Receiver
UHF Band I Diversity Reception I Changeable Frequency
External Power Supply



DM30 / DM20 / DM10
Professional Performance Microphone I Dynamic Cartidge
Detachable Microphone Holder I Noiseless 5 metre Cable

POWER SUPPLY UNIT



MPS1 For SXR6
Output : AC 17V-0-17V
Input : AC 220V 50Hz.

MPS2 For SXR16 | SXR12
Output : AC 18V-0-18V
Input : AC 220V 50Hz

MPS4 For SM120E | 800E
1242E | SM120U | SM80U
Output : AC 17V-0-17V
Input : AC 220V 50Hz.

MPS3 For SM6 / UM6 / UM3
Output : AC 12V-0-12V
Input : AC 220V 50Hz.

MPS5 For SM1603E | 1203E
Output : AC 19V-0-19V
Input : AC 220V 50Hz.

Improvement purpose, specification are subject to change

Stranger



POWER SUPPLY UNIT

FOR DD3 / RV3
PS1A - 9 Volt DC 500 mA. Max

FOR OCTAPAD
SPD11 & SPD20
PS4 - 12 Volt AC 1 Amp. Max

FOR KEYBOARD
SPS2 - 9/12 Volt DC 1 Amp. Max
SPS3 - 9/12 Volt DC 2 Amp. Max

PHANTOM POWER SUPPLY UNIT
PPS-48 - For 2 Microphone
IN/OUT Balance (XLR) I AC 220V 50 Hz



NEW LAUNCH

HE28S [BOOKSHELF POWERED SPEAKER]
2 X 5" Speaker and dynamic tweeter.
50 watts RMS power output.
USB I Bluetooth I Mp3 player with Recording
Auxilary input I Bass & Treble.
External Power Supply
Dimension : 185 (W) x 265 (D) x 318 (H) mm. I Weight : 7.850 Kg

SCAN ME
FOR WEBSITE

Please Check our HOLOGRAM before Buy.

STRANGER AUDIO PRIVATE LIMITED

R.O. : 3, Garanhatta Street, Kolkata - 700006, W.B., India
Ph. : +91 33 2555 5386

Factory : 17 & 18, Brindaban Basak Street, Kolkata - 700005, W.B. India
Ph. : +91 33 2533 4694. Mobile : 7439022855

E-mail : strangeraudiopvtltd@gmail.com
Website : www.strangeraudio.org / www.strangeraudio.in

KOLKATA - OUR HOME CITY

Connect with us on :